

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



Commonwealth
of Australia

Letters patent corresponding to

Patents Act 1990

W0 97 20 8 26

STANDARD PATENT

I, Vivienne Joyce Thom, Commissioner of Patents, grant a Standard Patent with the following particulars:

Name and Address of Patentee:

Agrolinz Melamin GmbH, St. Peter-Strasse 25 A-4021 Linz Austria

Names of Actual Inventors: Lorenzo Canzi; Gerhard Coufal and Martin Mullner

Title of Invention: Process for the preparation of pure melamine

Application Number: 11755/97

Term of Letters Patent: Twenty years commencing on 4 December 1996

Priority Details:

Number
A1994/95

Date
7 December 1995

Filed with
AUSTRIA

Dated this 2 day of December 1999

V.J. Thom

V.J. THOM
COMMISSIONER OF PATENTS



(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199711755 B2
(10) Patent No. 709030

(54) Title
Process for producing pure melamine

(51)⁶ International Patent Classification(s)
C07D 251/60 C07D 251/62

(21) Application No: 199711755

(22) Application Date: 1996.12.04

(87) WIPO No: WO97/20826

(30) Priority Data

(31) Number	(32) Date	(33) Country
A1994/95	1995.12.07	AT

(43) Publication Date : 1997.06.27

(43) Publication Journal Date : 1997.08.21

(44) Accepted Journal Date : 1999.08.19

(71) Applicant(s)
Agrolinz Melamin GmbH

(72) Inventor(s)
Lorenzo Canzi; Gerhard Coufal; Martin Mullner

(74) Agent/Attorney
GRIFFITH HACK,GPO Box 4164,SYDNEY NSW 2001

(56) Related Art
AU 43861/96

Process for the preparation of pure melamine

A multiplicity of processes for the preparation of melamine are already published in the literature. A preferred starting material in these is urea, which is
5 reacted either at high pressure and non-catalytically or at low pressure and using a catalyst to form melamine, ammonia and CO₂.

Although the known high-pressure processes, for instance those of Melamine Chemicals, Montedison or
10 Nissan, in which the melamine is first formed as a liquid, have a lower energy consumption in comparison to low-pressure processes, if no purification stages are present, melamine contains impurities such as melam, melem, ammeline, ammelide or ureidomelamine, which
15 interfere with some further melamine processing operations.

Melamine prepared by a high-pressure process is worked up, for example, according to US 4,565,867 (Melamine Chemicals) by separating off the CO₂ and NH₃,
20 waste gases from the liquid melamine, the pressure and temperature preferably being maintained at the same values as in the reactor. The liquid melamine is then fed to a product cooling unit, in which it is depressurized from 105 - 175 bar to about 14 - 42 bar and at the same
25 time rapidly cooled and quenched with liquid ammonia from 350 - 430°C to 48 - 110°C, by which means melamine separates out as a solid product.

According to US 3,116,294 (Montecatini), the CO₂ and NH₃ waste gases are likewise separated off first, the
30 liquid melamine is treated in countercurrent with NH₃ to remove CO₂ still dissolved, and the product is collected in a further reactor and allowed to dwell therein for a defined time. Finally, melamine is taken off from the second reactor and rapidly cooled by quenching with water
35 or by mixing with cold gases.

However, the purity of melamine which is produced by one of these processes is insufficient for many applications, for instance in the preparation of melamine-formaldehyd resins for surface coatings, sinc ,

in particular, the melem content is too high.

According to US 3,637,686 (Nissan), the crude melamine melt obtained by thermal decomposition of urea is rapidly cooled to 200 - 270°C with liquid NH₃ or cold
5 NH₃ gas, and is further cooled in a second step to 100 - 200°C with aqueous NH₃ solution. The product must then be recrystallized in order to achieve a satisfactory melamine purity.

The object of the present invention was therefore
10 to find a process which enables the preparation of pure melamine having a purity of up to greater than 99.8% and having a markedly reduced content of impurities, particularly melem and melam.

Unexpectedly, this object was able to be achieved
15 by a process in which liquid, ammonia-containing melamine is rapidly depressurized at a temperature at or just above the solidification point of melamine dependent on the particular prevailing ammonia partial pressure, the solidification point, depending on the temperature at the
20 beginning of depressurization and the desired final pressure, increasing by about up to 60°C, and solid melamine separating out.

The present invention therefore relates to a process for the preparation of pure melamine, which
25 comprises liquid, ammonia-containing melamine being rapidly depressurized from an ammonia partial pressure p_1 between 400 and 50 bar to an ammonia partial pressure p_2 between 200 bar and atmospheric pressure, where p_1 is always greater than p_2 , at a temperature which is 0 to
30 60°C higher than the melamine solidification point dependent on the particular prevailing ammonia partial pressure, but is below 350°C, higher pressures permitting a greater temperature interval from the melamine solidi-
fication point than lower pressures, by which means pure
35 melamine separates out in solid form, whereupon, in any sequence, the product is further depressurized if appropriate to atmospheric pressure, cooled to room temperature and the pure melamine is isolated.

The process according to the invention is suit-

able for the purification of melamine which is produced in any known process of the prior art and, in particular, contains impurities such as melem and melam, the melamine being able to be present either as melt or in the liquid phase or in crystalline form.

If the melamine to be purified is already present as melt or as liquid phase, such as downstream of a high-pressure reactor for the synthesis of melamine by conversion of urea, the pressure and the temperature of the melt or the liquid melamine are brought to the initial ammonia partial pressure desired for the depressurization between about 400 and 50 bar, preferably between about 400 and 80 bar, particularly preferably between about 300 and 100 bar, and to the corresponding above-defined temperature, i.e. to a temperature which is about 0 to 60°C, preferably about 0 to 40°C, particularly preferably about 0 to 20°C, above the melamine solidification point dependent on the particular prevailing ammonia partial pressure. In this process it must be noted that at elevated pressures the temperature difference between melamine solidification point and the temperature to be set at the beginning of depressurization can be greater than at lower pressures, since the solidification point of the melt at higher pressures is at lower temperatures than at low pressures. In order to achieve the temperature desired for the depressurization, the temperature is decreased if necessary. The temperature is particularly preferably below about 350°C. Cooling can be carried out either rapidly or slowly. Preferably, it is performed slowly at a cooling rate of 0.8 to 10°C/min. Since the melamine melt can absorb more ammonia at a lower temperature, ammonia is preferably fed during this operation. It is particularly advantageous to depressurize the liquid ammonia-containing melamine as far as possible close to or above the melamine solidification point dependent on the particular prevailing ammonia partial pressure. It is further possible by means of the present invention to purify solid, contaminated melamine. The melamine to be purified, which is present in crystalline form or as

powder, is first heated at an ammonia partial pressure between about 400 and 50 bar, preferably between about 400 and 80 bar, particularly preferably between about 300 and 100 bar, to a temperature which is about 0 to 60°C, preferably about 0 to 40°C, particularly preferably about 0 to 20°C, above the melamine solidification point dependent on the particular prevailing ammonia partial pressure. To melt solid melamine reliably, it is expedient firstly to heat it to about 370°C and then to cool it to the desired depressurization temperature to ensure that the melamine is completely molten. Preferably, the desired depressurization temperature is below about 350°C.

Again it must be noted that the temperature difference at elevated pressures can be greater than at lower pressures.

Preferably, the process of the invention is carried out directly after a melamine high-pressure process. Examples of high-pressure processes are, for instance, the Melamine Chemical, Montedison or Nissan process, as described, for example, in Ullmann's Encyclopedia of Industrial Chemistry, 5th Edition, Vol. A16, pp. 174-179. According to these processes, urea is usually converted in a temperature range from about 370 to 430°C and at a pressure of about 70 to 300 bar. The melamine formed in these processes is finally obtained as a liquid phase.

According to the process of the invention, the initial ammonia partial pressure desired for the rapid depressurization is, if necessary, set between about 400 and 50 bar. In order to set the corresponding initial temperature for the depressurization, the liquid melamine obtained from the urea conversion process is cooled from the temperature prevailing in the reactor by means of suitable cooling apparatuses, for instance by means of heat exchangers, to the appropriate value, i.e. to a temperature which is about 0 to 60°C, preferably about 0 to 40°C, particularly preferably about 0 to 20°C, above the melamine solidification point dependent on the

particular ammonia partial pressure set. Cooling can be performed in this process in any manner either rapidly or slowly. Preferably, the cooling is carried out at a rate which is between about 0.8°C/min and 10°C/min, preferably
5 with further ammonia being fed in. The temperature can also be decreased by means of a cooling program, in which, for example, cooling and holding phases or different cooling rates may alternate.

Prior to cooling, the NH_3/CO_2 gas mixture formed in the
10 reaction is separated off from the liquid melamine and the CO_2 dissolved in the liquid melamine is reduced by introducing gaseous ammonia. It is further possible to allow the liquid melamine, prior to the depressurization, to dwell for from about 5 minutes up to 20 hours at the
15 ammonia partial pressure set. Preferably, it is allowed to dwell for between 10 minutes and 10 hours, particularly preferably between 30 minutes and 4 hours. Longer dwell times are also possible if desired.

The ammonia-containing melamine to be purified is present
20 in liquid form prior to the depressurization. In the depressurization, the pressure is rapidly decreased, depending on the initial pressure set, to a value between atmospheric pressure and about 200 bar, preferably to between atmospheric pressure and about 150 bar, partic-
25 ularly preferably to between atmospheric pressure and about 50 bar.

In the depressurization, the ammonia dissolved in the melamine escapes, which increases the solidification point of the melamine then substantially freed from
30 ammonia by up to about 60°C, so that the liquid melamine immediately solidifies, and the formation of byproducts, in particular melem, is prevented. On the one hand, owing to the depressurization, the temperature in the system decreases, but on the other hand, owing to the melamine
35 solidification, heat of crystallization is released. It is assumed that the process proceeds approximately autothermally overall.

It is advantageous if the melamine melt is saturated with ammonia before the depressurization. However, it is also

possible to carry out the depressurization using a melamine melt not saturated with ammonia, but the advantage of the melting point elevation cannot be completely exploited in this case.

5 The depressurization can be performed directly in the vessel or the apparatus into which the liquid melamine was introduced. However, the depressurization can also be carried out by transferring or spraying melamine into one or more further vessels by means of
10 suitable spraying apparatuses. Preferably, in this case, an ammonia atmosphere is present in the vessel. Furthermore, it is particularly advantageous to depressurize the melamine into a vessel in which approximately the same temperature prevails as in the receptacle from which it
15 is depressurized.

The then solid melamine can, if desired, be kept at the then prevailing ammonia partial pressure and the prevailing temperatures for some further time, for instance for from 1 minute to 20 hours. Preferably, the solid melamine
20 is allowed to dwell under these conditions for between 10 minutes and 10 hours, particularly preferably for between 30 minutes and 3 hours. Preferably, the temperature in this case should be below about 290°C. Particularly preferably, the then solid melamine is allowed to dwell
25 at a temperature between about 280 and 250°C, the temperature during this period being able either to be kept constant or to be varied continuously or discontinuously. Subsequently to this depressurization process or the dwell time, the then solid melamine can, in any manner
30 and depending on the technical conditions, be initially cooled to room temperature and then further depressurized to atmospheric pressure or simultaneously, or in reverse order, can be further depressurized and cooled. Preferably, the solid melamine is firstly further
35 depressurized and then cooled to room temperature.

The already solid melamine is cooled to room temperature, for example, by quenching with a cold, liquid medium, for instance by means of liquid ammonia, by mixing with cold gases, by cooling by means of heat exchangers, for

example by means of a temperature program, or by simple removal of the heating medium.

The process of the invention can be carried out, as required, either in a discontinuous process or in a continuous process. It is particularly advantageous to carry out the process of the invention continuously.

In an advantageous embodiment, after separating off NH_3 and CO_2 , the melamine melt is allowed to dwell at an ammonia pressure of about 70-300 bar, preferably at the prevailing reactor pressure, the temperature is decreased, with further feed of ammonia, as close as possible to the solidification point prevailing at this ammonia partial pressure, then depressurized to about 50 bar to atmospheric pressure, if appropriate allowed to dwell, and further depressurized and cooled to room temperature.

The individual steps of the process of the invention, such as

- if appropriate separating off an NH_3/CO_2 gas mixture with
- if appropriate subsequent reduction of dissolved CO_2 content
- if appropriate allowing to dwell and cooling to the depressurization temperature
- depressurization
- if appropriate allowing to dwell in the solid state
- if appropriate further depressurization to atmospheric pressure and cooling to room temperature,

can be carried out, for example, in separate vessels or apparatuses suitable for the particular step. However, it is also possible to carry out two or more of these steps in shared apparatuses. The process procedure must, however, be matched to the particular conditions.

In order to determine the dependence of the melamine solidification point on the prevailing ammonia partial pressure, appropriate cooling experiments were carried out.

Melamine is obtained by the process of the invention in crystalline form or as a powder having a

purity of up to greater than 99.8% and has a markedly decreased content, in particular, of melem and melam.

Exempl [sic] 1-6:


Determination of the melamin solidification point dependent on the ammonia partial pressure.

5 9.9 g of melamine containing 0.1 g of melem were weighed into an autoclave together with the amount of ammonia required to set a defined pressure p, and melted. The reaction mixture was allowed to dwell at 370°C for some hours h, in order to enable establishment of equilibrium. The reaction mixture was then allowed to cool and the temperature course was monitored, the solidification point being recognizable by a brief temperature increase. The process parameters such as pressure, dwell time and the solidification point (Sp) determined can be seen in Table 1. The dependence of the melamine solidification point on the particular prevailing ammonia partial pressure is shown in Fig. 1.

Table 1:

Example	p (bar)	h	Sp (°C)
1	350	6	294
20 2	300	6	300
3	250	6	306
4	200	6	317
5	150	6	328
6	110	6	331

Fig. 1:

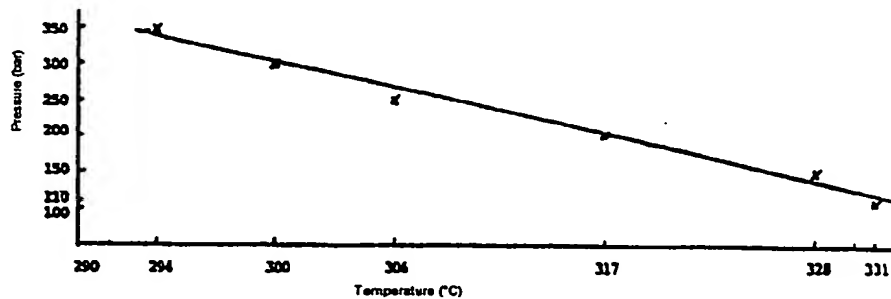

Example [sic] 7-19:

9.9 g of melamine having a melam content of 1300 ppm, 0.1 g of melem and the amount of ammonia required to achieve the pressure p_1 desired prior to the depressurization were introduced into a laboratory autoclave having a volume of 70 ml. The autoclave was then brought to a temperature T_1 , cooled if appropriate in x minutes to a temperature T_2 , and kept at this temperature for t_1 minutes. The pressure was then rapidly reduced to a defined pressure p_2 , and then, if appropriate, kept for t_2 minutes under the then-prevailing reaction conditions.

When this process was complete, the mixture was abruptly cooled and depressurized in the water bath and the melamine obtained was analyzed.

The process parameters such as pressure p_1 and p_2 , temperature T_1 and T_2 , cooling time from T_1 to T_2 in x minutes, dwell times t_1 and t_2 , and the final content of melem (ME) and melam (MA) can be seen in Table 2.

Table 2:

Ex.	p ₁ (bar)	T ₁ (°C)	x (min)	T ₂ (°C)	t ₁ (min)	p ₂ (bar)	t ₂ (min)	ME ppm	MA ppm
7	300	310	0	310	120	150	0	40	<300
5 8	250	320	0	320	120	150	0	65	350
9	250	370	60	320	120	35	0	190	400
10	250	370	60	320	120	50	5	80	410
11	250	370	60	320	120	150	5	80	500
12	250	370	60	320	120	150	5	45	310
10 13	250	370	60	320	30	150	5	25	<300
14	250	370	60	320	10	50	5	65	<300
15	250	370	30	320	10	50	5	185	530
16	250	370	60	320	10	150	5	50	<300
17	250	370	30	320	10	150	5	50	<300
15 18	250	370	7	320	10	150	5	45	<300
19	200	335	0	335	120	150	0	220	440

Example [sic] 20-36:

x g of melamine (M₀) having a melam content (MA₀) of 1300 ppm and y g of melem (ME₀), and the amount of ammonia required to achieve the pressure p₁ desired prior to the depressurization, were introduced into a laboratory autoclave A1 having a volume of 100 ml. The autoclave was then brought to a temperature of 370°C (T₁) and kept at T₁ for t₁ minutes. The autoclave was then cooled to a temperature T₂ in z₁ minutes and kept at this temperature for t₂ minutes.

In Example [sic] 20-32, subsequently thereto, the melamine situated in A1 was sprayed into a laboratory autoclave A2 having a volume of 1000 ml which was kept at a temperature of T₁ and a pressure p₁.

In Example [sic] 33 and 34, the temperature T₁ in the autoclave A1 was decreased to the temperature T₂, in t₂ minutes. Simultaneously with this, the temperature T₁ in the autoclave A2 was decreased to the temperature T₂, and the pressure was set to the value of p₁ and the melamine from A₁ was sprayed into A₂.

In Example [sic] 35 and 36, only a portion of the liquid

melamine was sprayed from the autoclave A1 into the autoclave A2, by a valve in the line between A1 and A2 being briefly opened and closed again. This kept the pressure drop in A1 and the pressure increase in A2 low.

5 After the product transfer, the temperature T_1 in A1 changed to a value $T_{1,1}$, and the pressure p_1 to a value of p_2 . In the autoclave A2, the temperature T_2 changed to a value $T_{2,1}$ and the pressure p_2 to a value $p_{2,1}$. The melamine (M_1) remaining in A1 was cooled to a temperature T_4 in z_2 minutes, then depressurized, rapidly cooled and analyzed (ME_1 , MA_1).

10 The melamine (M_2) sprayed into A2 was cooled to a temperature T_5 in z_3 minutes, depressurized, rapidly cooled and analyzed (ME_2 , MA_2).

15 The process parameters such as pressure p_1 , p_2 , p_3 and $p_{3,1}$, temperature T_1 , T_2 , $T_{2,1}$, $T_{2,2}$, T_3 , $T_{3,1}$, T_4 and T_5 , cooling time z_1 , z_2 and z_3 minutes, dwell times t_1 , t_2 and $t_{2,2}$, and the initial (M_0) and final (M_1 , M_2) weights of melamine, the initial melam content (ME_0) and the final contents of melam (ME_1 , ME_2) and melam (MA_1 , MA_2) can be
20 seen in Table 3.

Table 3: Autoclav A1 ($T_1 = 370^\circ\text{C}$) prior to product transfer

Example	xM_0 (g)	yME_0 (g)	P_1 (bar)	t_1 (min)	z_1 (min)	T_2 ($^\circ\text{C}$)	t_2 (min)	T_{2s} ($^\circ\text{C}$)	t_{2s} (min)
20	9.9	0.1	250	0	60	320	10		
21	9.9	0.1	250	0	60	315	10		
22	9.9	0.1	250	0	60	310	10		
23	9.9	0.1	350	0	60	300	10		
24	29.7	0.3	250	90	60	320	10		
25	19.8	0.2	250	120	60	320	10		
26	19.8	0.2	250	120	60	320	10		
27	9.9	0.1	300	0	60	315	10		
28	9.9	0.1	200	0	60	330	10		
29	9.9	0.1	350	0	60	303	10		
30	9.9	0.1	350	0	60	310	10		
31	9.9	0.1	200	60	60	330	10		
32	19.8	0.2	250	120	60	320	10		
33	9.9	0.1	250	60	53	320	120	312	24
34	9.9	0.1	250	60	41	330	120	314	32
35	9.9	0.1	265	120	69	316	0		
36	9.9	0.1	260	120	59	317	0		

Autoclave A1 after product transfer

Example	$T_{2,1}$ ($^\circ\text{C}$)	P_2 (bar)	M_1 (g)	T_4 ($^\circ\text{C}$)	z_2 (min)	ME_1 (ppm)	MA_1 (ppm)
20	307	90	5.5	245	13	20	<300
21	285	85	7.0	RT	r	20	<300
22	275	85	8.0	250	14	20	<300
23	270	50	4.0	250	4	<20	<300
24	326	175	22.0	280	14	<20	<300
25	304	70	1.0	280	6	55	490
26	307	80	10.5	280	13	20	<300
27	294	80	3.0	280	12	25	<300
28	314	80	1.2	280	18	<20	380
29	274	60	3.5	250	8	<20	370
30	275	65	1.5	250	4	<20	<300
31	306	50	1.5	280	8	100	800
32	302	65	1.0	280	10	50	630

Example	T _{1,1} (°C)	P ₁ (bar)	M ₁ (g)	T ₄ (°C)	z ₁ (min)	ME ₁ (ppm)	MA ₁ (ppm)
33	292	80	4.9	300	10	<20	<300
34	295	80	0.8	300	6	<20	<300
35	311	220	3.8	300	6	<50	800
36	-	235	3.2	300	6	<50	820

Autoclave A2

Ex.	T ₁ (°C)	P ₁ (bar)	T _{3,1} (°C)	P _{3,1} (bar)	M ₁ (g)	T ₃ (°C)	z ₁ (min)	ME ₁ (ppm)	MA ₁ (ppm)
20	277	52	284	79	3.5	250	12	75	<300
21	280	51	282	76	2.7	RT	r	75	600
22	281	52	282	76	1.1	250	8	55	650
23	280	0	280	40	6.0	250	12	60	1100
24	320	6	320	15	3.0	280	15	40	1600
25	300	40	309	68	15.5	280	8	95	360
26	302	50	306	74	8.0	280	11	70	540
27	282	40	285	72	4.5	280	4	20	780
28	302	50	304	72	3.8	280	12	65	650
29	280	17	280	60	5.5	250	10	20	1400
30	300	20	300	62	4.5	280	9	25	770
31	298	20	300	48	6.5	280	12	110	1000
32	300	30	305	62	16.0	280	11	45	790
33	312	52	312	78	2.9	280	15	<20	<300
34	314	51	314	76	6.2	280	15	20	300
35	316	53	316	57	2.8	280	15	<20	400
36	280	55	280	-	3.2	275	3	40	750

RT to room temperature

r rapidly

Patent Claims

1. A process for the preparation of pure melamine, which comprises liquid, ammonia-containing melamine being
5 rapidly depressurized from an ammonia partial pressure p_1 between 400 and 50 bar (40 and 5 MPa) to an ammonia partial pressure p_2 between 200 bar (20 MPa) and atmospheric pressure, where p_1 is always greater than p_2 , at a temperature which is 0 to 60°C higher than the melamine
10 solidification point dependent on the particular prevailing ammonia partial pressure, but is below 350°C, higher pressures permitting a greater temperature interval from the melamine solidification point than lower pressures, by which means pure melamine separates out in solid form,
15 whereupon, in any sequence, the product is further depressurized if appropriate to atmospheric pressure, cooled to room temperature and the pure melamine is isolated.
- 20 2. The process as claimed in claim 1, wherein a melamine to be purified which is already present as melt or as liquid phase is brought to the ammonia partial pressure desired for the depressurization between about 400 and 50 bar (40 and 5 MPa) and to a temperature which is about 0 to
25 60°C above the melamine solidification point dependent on the particular prevailing ammonia partial pressure.
3. The process as claimed in claim 2, wherein the melamine to be purified is already present as melt or as
30 liquid phase downstream of a high-pressure reactor for melamine synthesis by urea conversion.
4. The process as claimed in claim 2 or claim 3, wherein the melamine to be purified is brought to the
35 ammonia partial pressure desired for the depressurization between about 400 and 80 bar (40 and 8 MPa).



5. The process as claimed in claim 4, wherein the melamine to be purified is brought to the ammonia partial pressure desired for the depressurization between about 300 and 100 bar (30 and 10 MPa).

5

6. The process as claimed in any one of claims 2 to 5, wherein the melamine to be purified is brought to a temperature which is about 0 to 40°C above the melamine solidification point dependent on the particular prevailing ammonia pressure.

10

7. The process as claimed in claim 6, wherein the melamine to be purified is brought to a temperature which is about 0 to 20°C above the melamine solidification point dependent on the particular prevailing ammonia partial pressure.

15

8. The process as claimed in any one of claims 2 to 7, wherein, in the process, the temperature decreased.

20

9. The process as claimed in any one of claims 2 to 8, wherein, in the process, the temperature is decreased at a cooling rate of 0.8 to 10°C/min.

25



10. The process as claimed in any one of claims 2 to 9, wherein, in the process, ammonia is fed.

30

11. The process as claimed in one of claims 2 to 10, wherein the NH_3/CO_2 gas mixture forming in the urea conversion is separated off from the liquid melamine and the CO_2 dissolved in the liquid melamine is reduced by introducing gaseous ammonia.

35

12. The process as claimed in any one of claims 1 to 11, wherein, before the depressurization, the liquid melamine is allowed to dwell for about 5 minutes to 20 hours.



13. The process as claimed in claim 12, wherein the liquid melamine is allowed to dwell from 10 minutes to 10 hours.

5

14. The process as claimed in claim 13, wherein the liquid melamine is allowed to dwell for between 30 minutes and 4 hours.

10

15. The process as claimed in one of claims 1 to 14, wherein, before the depressurization, the liquid melamine is saturated with ammonia.

15

16. The process as claimed in any one of claims 1 to 15, wherein the depressurization of the liquid, ammonia-containing melamine is carried out as closely as possible to or above the solidification point of the melamine dependent on the particular ammonia partial pressure.

20

17. The process as claimed in any one of claims 1 to 16, wherein the liquid, ammonia-containing melamine is depressurized to a pressure between atmospheric pressure and about 200 bar (20 MPa).

25

18. The process as claimed in claim 17, wherein the liquid, ammonia-containing melamine is depressurized to a pressure between atmospheric pressure and about 150 bar (15 MPa).

30

19. The process as claimed in claim 18, wherein the liquid, ammonia-containing melamine is depressurized to a pressure between atmospheric pressure and about 50 bar (5 MPa).

35

20. The process as claimed in any one of claims 1 to 19, wherein the depressurization is performed in the vessel into which the liquid melamine was introduced.

21. The process as claimed in any one of claims 1 to 19, wherein the depressurization is carried out by transferring or spraying into one or more vessels.

5

22. The process as claimed in either one of claims 20 and 21, wherein an ammonia atmosphere is present in the vessels.

10 23. The process as claimed in either one of claims 20 and 21, wherein approximately the same temperature prevails in the vessels as in a receptacle from which depressurization is performed.

15 24. The process as claimed in any one of claims 1 to 23, wherein, after the depressurization, the then solid melamine is allowed to dwell at a pressure between 200 bar (20 MPa) and atmospheric pressure for about 1 minute to 20 hours.

20

25. The process as claimed in claim 24, wherein the then solid melamine is allowed to dwell for between 10 minutes and 10 hours.

25 26. The process as claimed in claim 25, wherein the then solid melamine is allowed to dwell for between 30 minutes and 3 hours.

30 27. The process as claimed in any one of claims 24 to 26, wherein, after the depressurization, the then solid melamine is allowed to dwell at a temperature below about 290°C.

35 28. The process as claimed in claim 27, wherein the then solid melamine is allowed to dwell at a temperature between about 280 and 250°C.

29. The process as claimed in any one of claims 1 to 28, wherein the already solid melamine is cooled to room temperature by quenching with a cold, liquid medium.
- 5 30. The process as claimed in claim 29, wherein the solid melamine is cooled to room temperature by means of liquid ammonia, by mixing with cold gases, or by means of heat exchangers.
- 10 31. The process as claimed in any one of claims 1 to 30, wherein it is carried out continuously.
32. The process as claimed in any one of claims 1 to 31, wherein it is carried out immediately downstream of a
15 melamine high-pressure process.
33. The process as claimed in any one of claims 1 and 12 to 32, wherein the melamine to be purified which is initially present as solid is heated at an ammonia partial
20 pressure between about 400 and 50 bar (40 and 5 MPa) to a temperature which is about 0 to 60°C above the melamine solidification point dependent on the particular prevailing ammonia partial pressure.
- 25 34. The process as claimed in claim 33, wherein the melamine to be purified which is initially present as solid is heated at an ammonia partial pressure between about 400 and 80 bar (40 and 8 MPa).
- 30 35. The process as claimed in claim 34, wherein the melamine to be purified which is initially present as solid is heated at an ammonia partial pressure between about 300 and 100 bar (30 and 10 MPa).
- 35 36. The process as claimed in any one of claims 33 to 35, wherein the melamine to be purified which is initially present as solid is heated to a temperature which is about

0 to 40°C above the melamine solidification point dependent on the particular prevailing ammonia partial pressure.

37. The process as claimed in claim 36, wherein the
5 melamine to be purified which is initially present as solid is heated to a temperature which is about 0 to 20°C above the melamine solidification point dependent on the particular prevailing ammonia partial pressure.

10 38. A process for the preparation of pure melamine substantially as herein described with reference to any one of the illustrative examples.

15

Dated this 15th day of June 1999

AGROLINZ MELAMIN GMBH

By their Patent Attorneys
GRIFFITH HACK

20

13

8

14

